

## HIGH POWER LASER MODULE WITH FIBER OUTPUT

ALC-650-06000-FM400.22-Setia

### Features

- Compact size
- Detachable 400 $\mu$ m SMA-fiber
- Thermistor
- Power monitor

### Applications

- Medical
- Solid State Laser Pumping
- Material Processing



### Specifications

Optical Parameters	Units	
--------------------	-------	--


Center Wavelength	nm	650
Wavelength Tolerance	nm	$\pm 5$
Spectral Width (FWHM)	nm	3
Wavelength Temp. Coefficient	nm/ $^{\circ}$ C	1.2
Output Power	W	6.0
Operating Current	A	1.85
Operating Voltage	V	<14.5
Threshold Current	A	0.25

Fiber Parameters		
------------------	--	--

Fiber Core Diameter	$\mu$ m	400
Numerical Aperture		0.22
Fiber Connector		SMA-905

### Pin-Out

1. Red pointer (+)
2. Red pointer (-)
3. Power monitor (+)
4. Laser Diode Anode
5. Laser Diode Anode
6. Not connected
7. Not connected
8. Not connected
9. Thermistor
10. Thermistor
11. Not connected
12. Not connected
13. Power monitor (-)
14. Laser Diode Cathode
15. Laser Diode Cathode

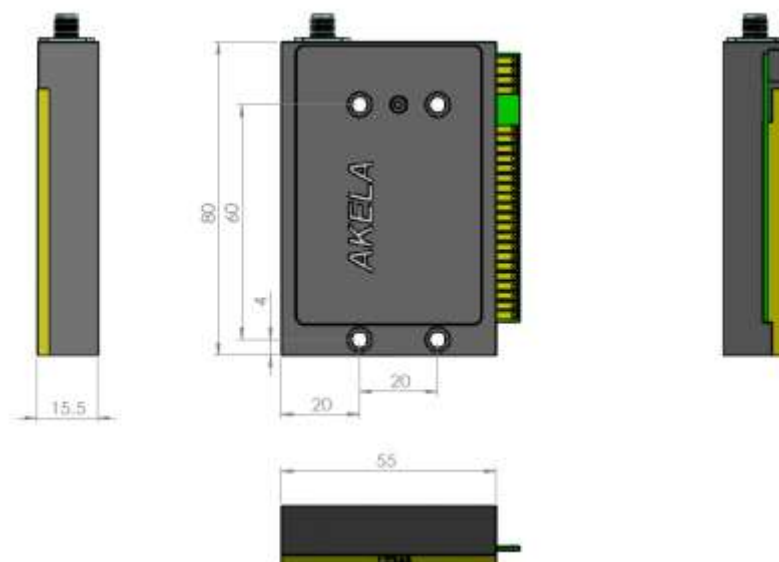

These components do not comply with the Federal Regulations (21 CFR Subchapter 1) as administered by the Center for Devices and Radiological health.

Purchaser acknowledges that his/her products must comply with these regulations before they can be sold.

Akela laser Corporation reserves right to change any specifications.